SPON

CEILING SPEAKER
Installation Manual





1. Specifications, Functional parts, and Parameters


Input Power	6W(100V)
Rated Impedance	6.6KΩ(1.5W)/3.3KΩ(3W)/1.7KΩ(6W)
SPL	91±3dB（1M/1W）
Frequency Response	140Hz~20kHz
Speaker Unit	6” *1
Mounting Hole Size	Φ170mm
Speaker Mounting Method	Ceiling Recessed
Connection Type	22# 1007 Cable
Materials	Front Shell, Back Shell：ABS
Size	Φ186*110mm
Weight	1.2kg/1PC
Operation Temperature	-25℃ to +55℃
Storage Temperature	-40℃ to +70℃
Relative Humidity	≤95%

2. Three View


Unit：mm

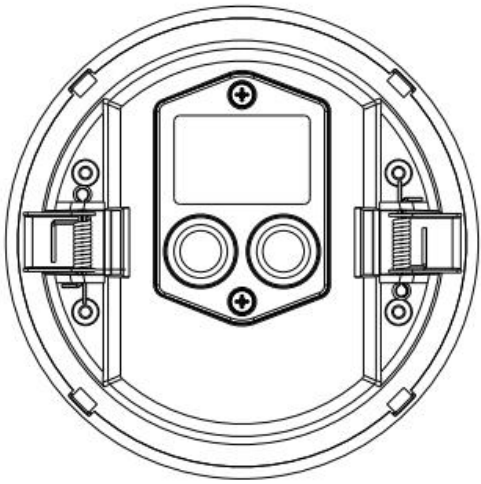

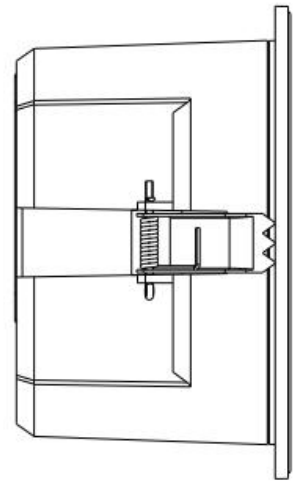

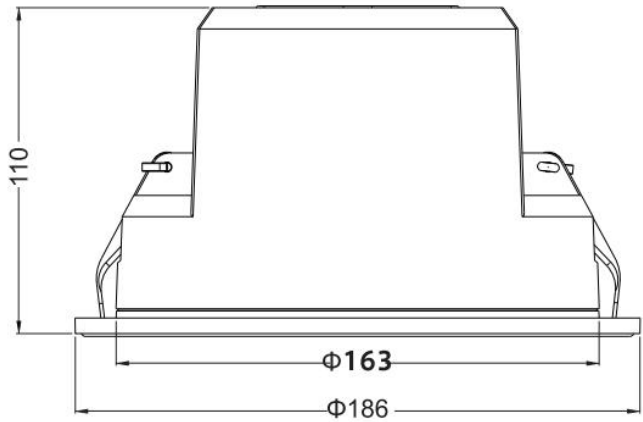


3. Circuit Diagram

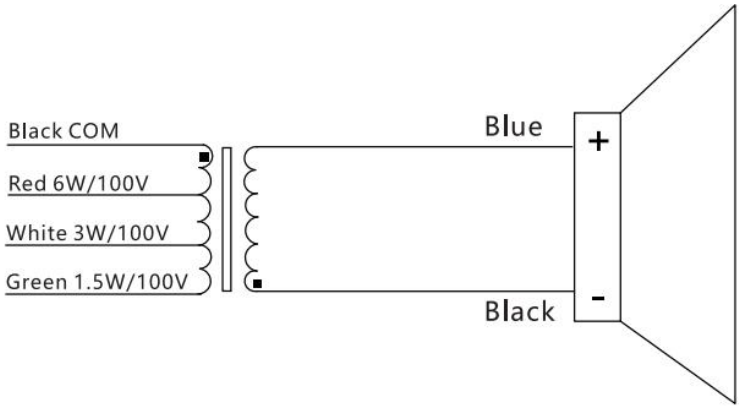


4. Installation Instructions


（1）Create a ϕ170 mm mounting hole on the installation plane.




（2）Connect the audio cable and pull the clip so that it passes through the mounting plane.

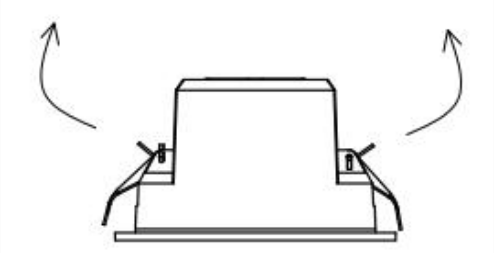

（3）The product is clamped to the mounting surface.

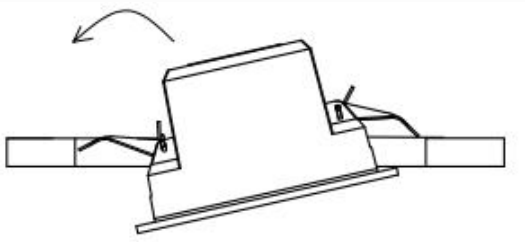

（4）Complete the installation.

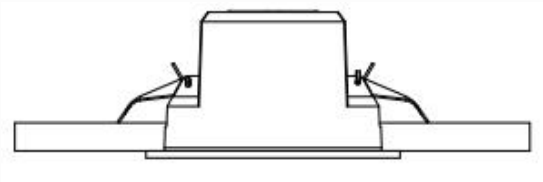

5. Packing list

（1）Ceiling speaker 1pcs

（2）Installation Manual 1pcs

（3）Warranty Card and Certificate 1pcs