SPON

PENDANT SPEAKER
Installation Manual




1. Specifications, Functional parts, and Parameters


Input Power	7.5W/15W/30W/60W/8Ω（100V） 3.8W/7.5W/15W/30W/60W/8Ω(70V)
Nominal Impedance	1.33KΩ/667Ω/333Ω/167Ω/8Ω（100V） 2.63KΩ/1.33KΩ/667Ω/333Ω/167Ω/8Ω(70V)
Sensitivity	89±3dB（1M/1W）
Frequency Response	90Hz-20KHz
Loudspeaker unit	6.5" Bass *1+1/2" treble *1
Mounting hole size	Mpa 8 hook
Loudspeaker Mounting Method	Hanging type
Connection Type	Two core sheathed wire
Materials	ABS+aluminum mesh
Size	Φ226*224mm
Weight	3.12kg/1PC
Operating Temperature	-25℃ to +55℃
Storage Temperature	-40℃ to +70℃
Relative Humidity	≤95%

2. Three View

Unit：mm

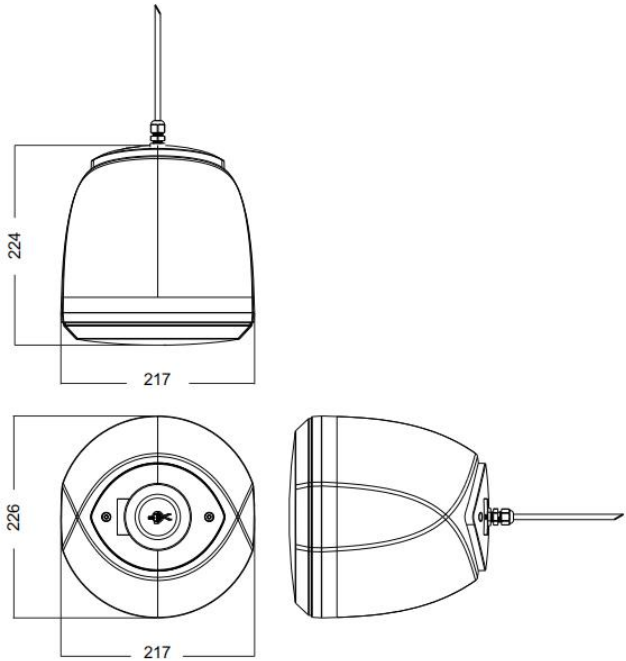

3. Circuit Diagram

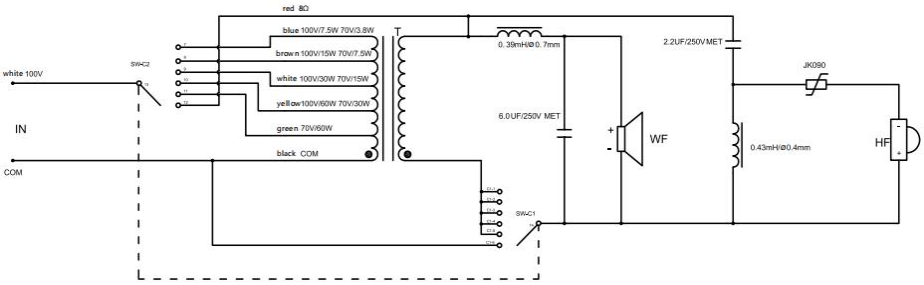


4. Installation Instructions


（1）Install an M6 expansion hook to the ceiling.

（2）Take out the speaker and push down the wire cup. Hang the wire ring on the hook.

（3）Connect the audio cable and push the cable cup close to the ceiling. Cover where the hook meets the audio cable.

（4）Installation complete

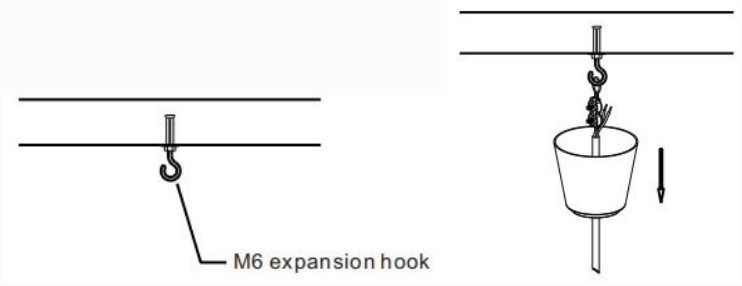

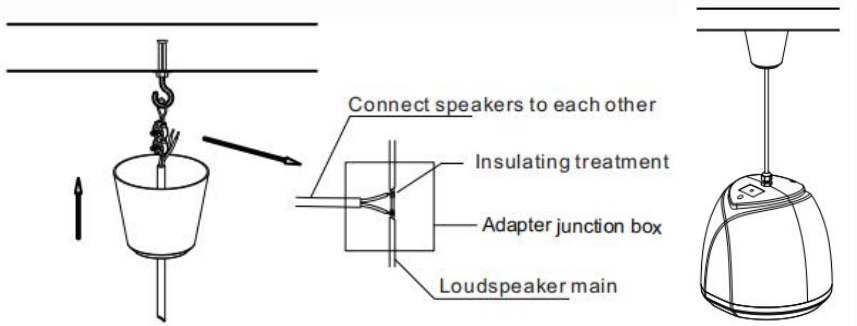

5. Packing list

（1）Pendant Speaker 1pcs

（2）Installation Manual 1pcs

（3）Warranty Card and Certificate 1pcs

SPON Communications Co., Ltd.
www.sponcomm.com
Service Hotline: +86-731-85570190
Reserve the amendment right without notice

V1.0B240122