SPON

SOUND PROJECTOR SPEAKER

Installation Manual




1. Specifications, Functional parts, and Parameters

General Specification	
Frequency Response	140Hz-15KHz
Sensitivity(1m/1W)	89±3dB
Rated Power	30W
Power Taps	3.75W/7.5W/15W/30W&8Ω
Line input	70V/100V
Dimension(mm)	Φ170*212
Physical Specification	
Material	ABS
Component	5"
Grill	Powder Coated Iron Mesh
Finished Colour	RAL7035
Unit Weight	1.9Kg
Gross Weight	14.6Kg/6PCS
Packing Dimension(cm)	73*55*25
Woofer Speaker Specification	
Voice Coil Size	Φ0. 13*2Layer
DC Impedance	6.8Ω
Former	Kapton
Magnet	Ferrite(305g)
	Φ80*Φ32*15(Y30)
Basket	Iron
Cone Material	Paper
Spider	Cloth
Dust cap	Mylar
Net Weight	830g

2. Three View

Unit：mm

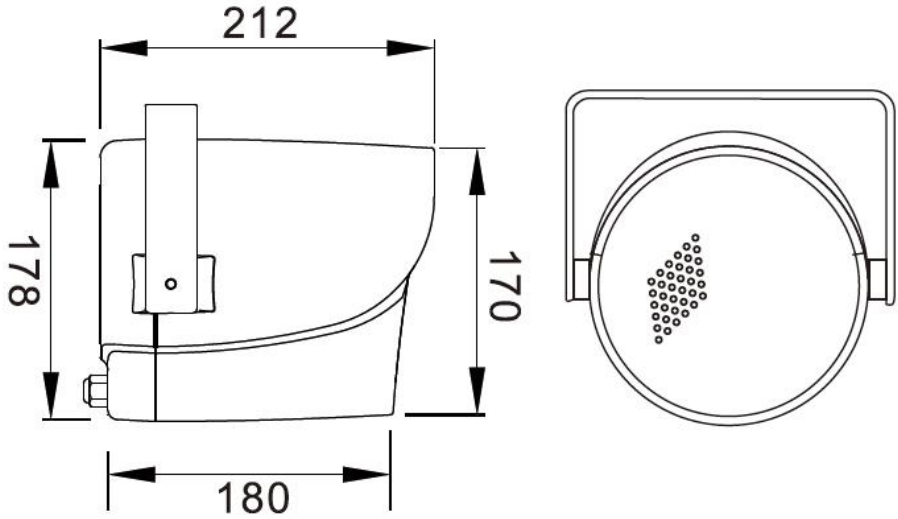

3.Packing list

（1）Sound Projector Speaker 1pcs

（2）Installation Manual 1pcs

（3）Warranty Card and Certificate 1pcs

SPON Communications Co., Ltd.
www.sponcomm.com
Service Hotline: +86-731-85570190
Reserve the amendment right without notice

Wechat

V1.0B240122