

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 4" +1.5" two ways speaker unit
- Power taps 2.5w-5w-10w-20w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket

Description

The T-774H is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 4"+1.5" two ways speaker driver is designed of wide frequency response 120-18kHz, the multiple power taps 2.5W, 5W, 10W & 20W are helpful for different applications varies from room size and ambient noise surroundings.

The metal grille, ABS enclosure and stainless mounting bracket are of black color. Easy and secure wall mount installation through the supplied mounting bracket.


It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.


Specification


Model	T-774H	
Power Taps @100V	2.5W, 5W, 10W, 20W	
Power Taps @70V	1.25W, 2.5W, 5W, 10W, 20W	
Transformer Impedance	4KΩ/2KΩ/1KΩ/500Ω/250Ω	
Input	70V/100V/8Ω	
SPL(1W/1M)	86dB	
Max. SPL (Rated W/1M)	99dB	
Frequency Response (-10dB)	120-18KHz	
Finish	Baffle: ABS, Black/White	Grille: Steel, Black/White
Speaker Driver	4" x1	1.5" x1
Dimensions	260 x170 x 170mm	
Weight	2.3kg	
Mounting	With mounting bracket fixed by screw	

Wall Mount Speaker (Dampproof) (2.5W-5W-10W-20W)

Appearance:

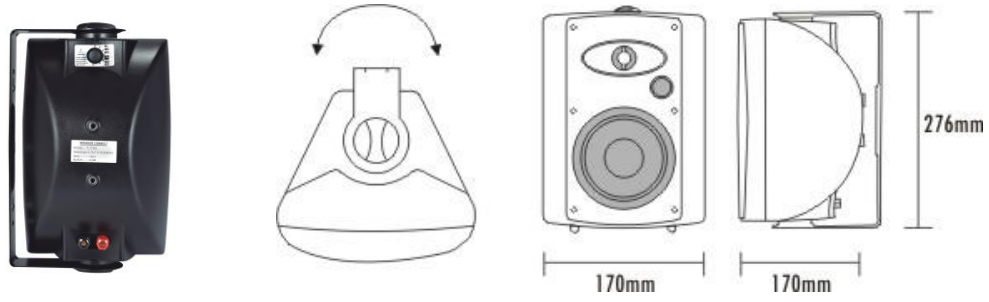

Direction Diagram:

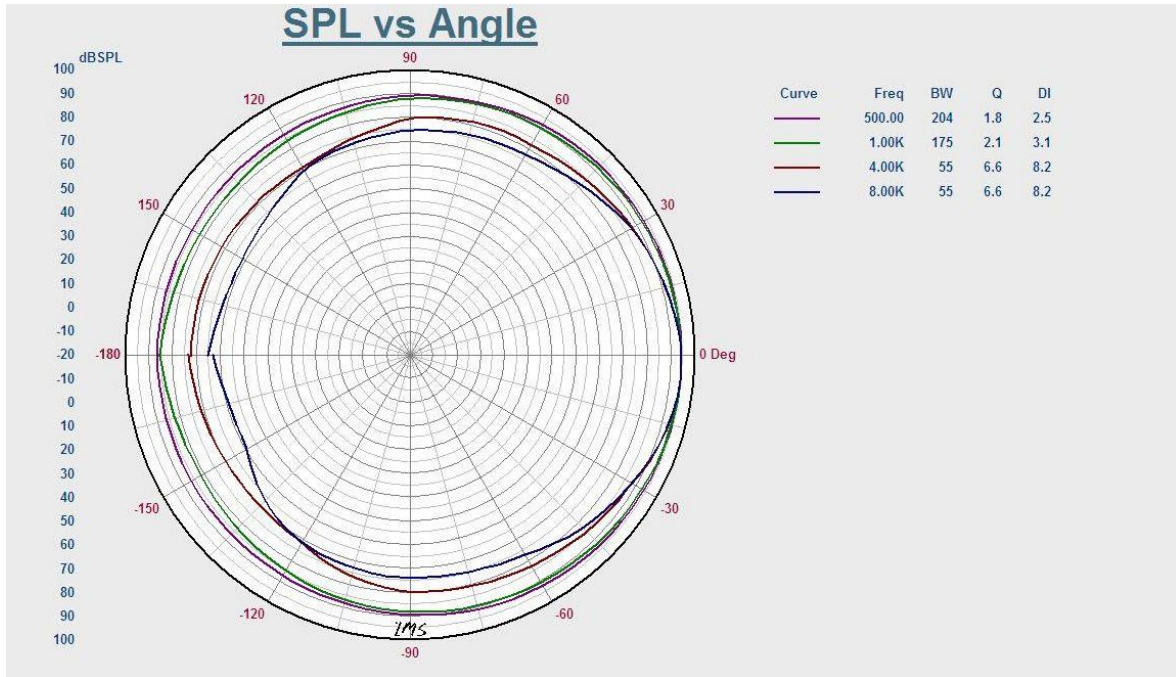

Frequency Response:

